


9111-C Series

H.D. 2.0mm(0.079") Futurebus(+) 4 Rows Male Right Angle Type

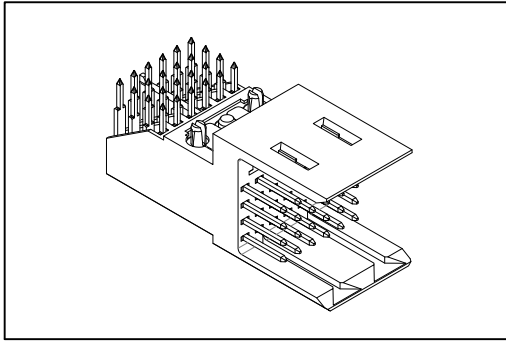

Material:

Housing: High Temperature Plastic UL94V-0.

Contacts: Copper Alloy.

Electrical Characteristics:

Current Rating: 1 A.

Dielectric Withstanding Voltage: AC 1000V .

Insulator Resistance: 1000MΩ min.

Contact Resistance: Row a 25mΩ max.

Row b 35mΩ max.




Row c 40mΩ max.

Row d 45mΩ max.

Operating Temperature: -55°C~+125°C.

Features:

- * 2mm high density futurebus+ male right angle solder type.
- * Available pin count 24.
- * Side by side stackable.
- * Push-Fit peg.
- * For Through-hole Reflow.

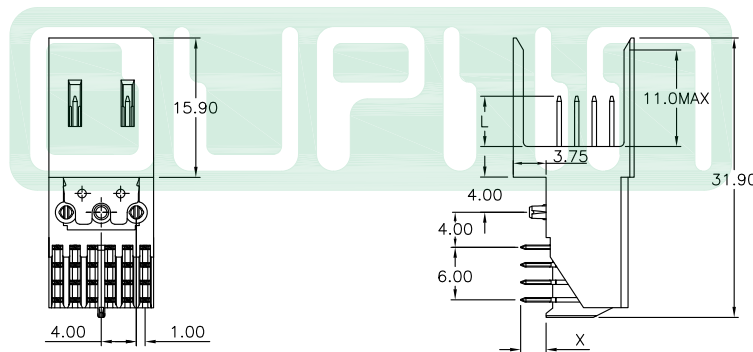

P.C. Board Layout

**Available Type		
TYPE NO.	DIP(X)	
*	1	2.90
	2	3.53
**Available Type		
TYPE NO.	L	
*	A	5.00
*	B	5.75
*	E	6.50
	F	7.25
	H	8.00

Ordering information

9111-C 4 5 24 B 1 1 CB 30 D T
 Series 4:4Rows 5: Male Position B: A~H 1: Dip Length 1: With Metal CB:Contact 30μ" D:Dip Type T: Tape & Reel
 Signal Contact Length Plate Au+Pd/Ni, Dip Tin plated Package