9111-A Series

H.D 2.0mm(0.079") Futurebus(+) 4 Rows Female Right Angle Type

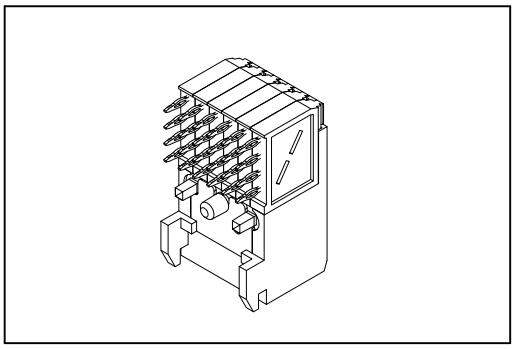

Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0.
Contacts: Copper Alloy.

Electrical Characteristics:

Current Rating: 2 A.
Dielectric Withstanding Voltage: AC 1500V.
Insulator Resistance: 1000MΩ min.
Contact Resistance: 20mΩ max.
Operating Temperature: -55°C ~+125°C.

Features:

* 2mm high density futurebus+ female right angle solder and Press Fit Type.
* Available pin count from 24~48.
* Side by side stackable.
* Push-Fit peg.









P.C. Board Layout



Press Fit Type



Dip Type

Position	Dimension		
	A	B	C
24	11.95	10.0	8.0
48	23.95	22.0	20.0

Ordering information

9111-A	4	2	24	1	1	CB	30	D	U
Series	4: 4 Rows	2: Female	Position	1: Dip Length	0: None Metal Plate 1: With Metal Plate	CB:Contact Au+Pd/Ni, Dip Tin plated	30: 30 μ"	D: Dip Type P: Press Fit Type	U: Tube Package

Information including designs, specifications and components may be changed or updated without notice.