


9111 Series

H.D. 2.0mm(0.079") Futurebus(+)4 Rows Male Right Angle Type

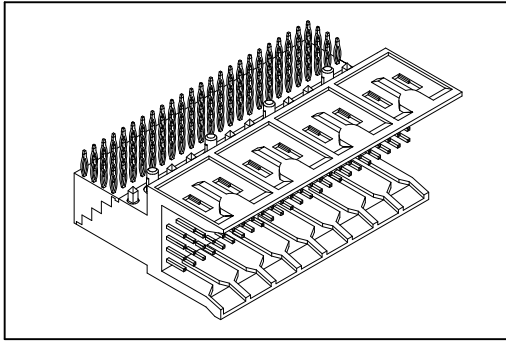

Material:




Housing: High Temperature Plastic UL94V-0.
Contacts: Copper Alloy.

Electrical Characteristics:


Current Rating: 1 A.
Dielectric Withstanding Voltage: AC 1000V.
Insulator Resistance: 1000MΩ min.
Contact Resistance: 30mΩ max.
Operating Temperature: -55°C ~ +125°C.

Features:


- * 2mm high density futurebus+ male right angle solder and press fit type.
- * Side by side stackable.
- * Push-Fit peg.

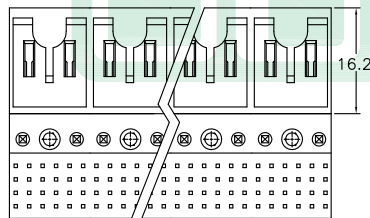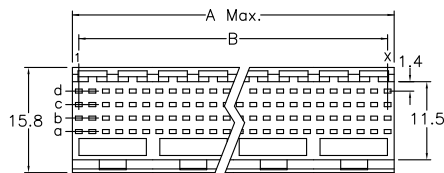

Dip Type



Press Fit Type

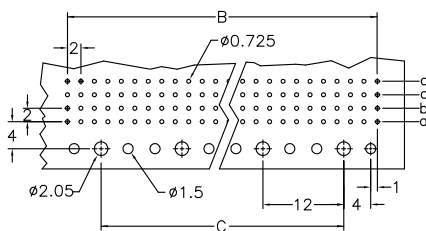

P.C. Board Layout

Contact Length (L)	A	5.00	
	B	5.75	
E	6.50		
F	7.25		
H	8.00		
Dip Length (X)	1	2	
	2.90	3.53	
**Available Position			
Position	Dimension		
	A	B	C
* 24	11.95	10	
* 48	23.95	22	12
* 72	35.95	34	24
* 96	47.95	46	36
* 120	59.95	58	48
* 144	71.95	70	60
* 168	83.95	82	72
* 192	95.95	94	84

Ordering information

9111- 4 5 24 A 1 C 10 D U
 Series 4: 4Rows 5: Male Position A: A ~ H 1: Dip Length C: Selective Gold 10: 10 μ" D: Dip Type U: Tube
 Signal Contact Length 2: Dip Length Plated Package