


# 9111 Series

## Hard Metric Connector Female Right Angle Type B-25

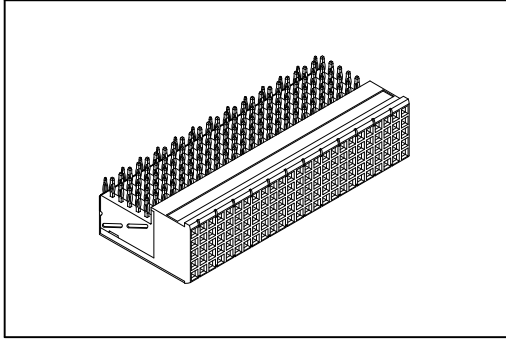

### Material:


Housing: Thermoplastic Polyester Glass Filled UL94V-0.  
Contacts: Copper Alloy.

### Electrical Characteristics:

Current Rating : 1 A.  
Dielectric Withstanding Voltage: AC 750V.  
Insulator Resistance: 1000MΩ min.  
Contact Resistance: 20mΩ max.  
Operating Temperature: -55°C ~+125°C.

### Features:

\* Type B Right Angle Female  
5 X 25 Position Fully Loaded.

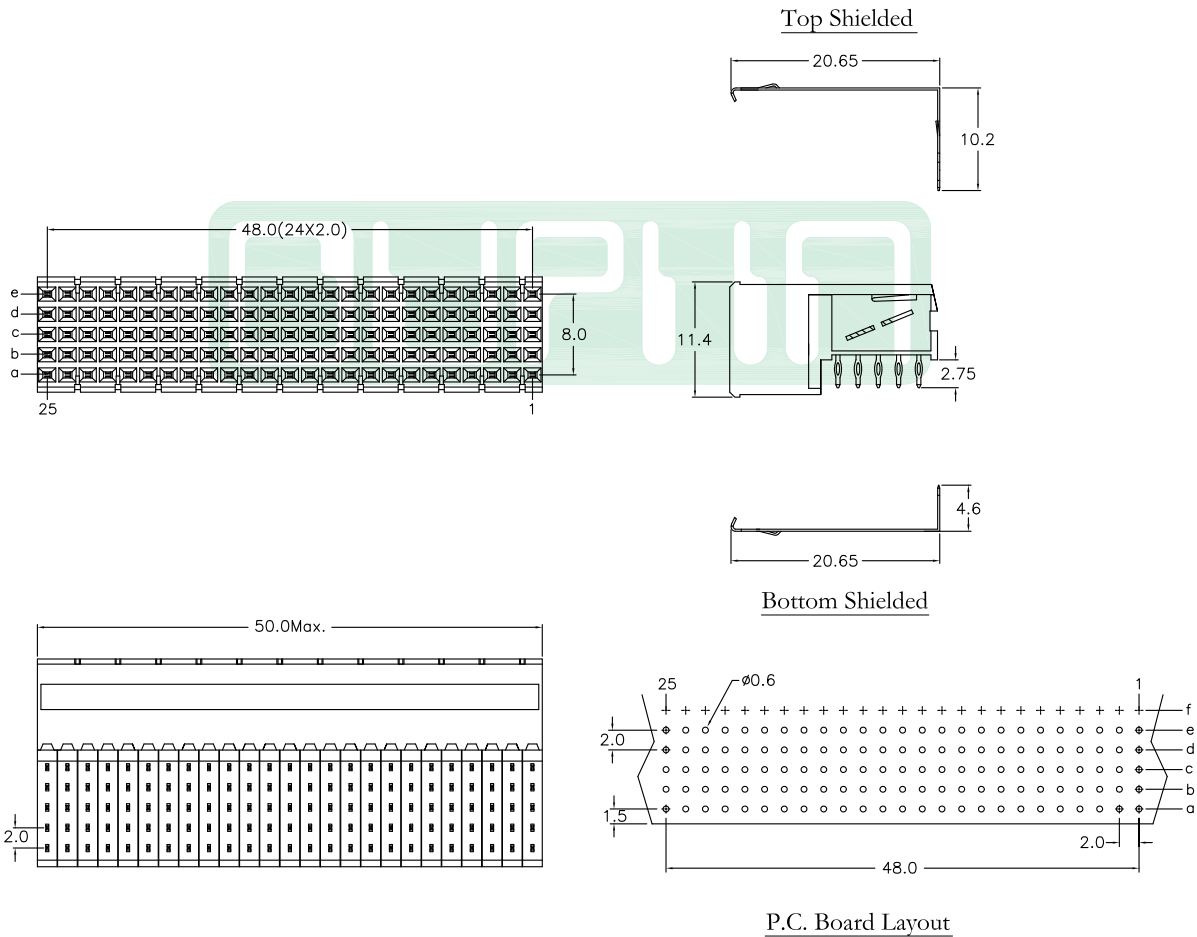

## Ordering information

<u>9111-</u>	<u>7</u>	<u>2</u>	<u>B</u>	<u>125</u>	<u>1</u>	<u>CB</u>	<u>30</u>	<u>U</u>
Series	7Row	2: Female	B: Type B	Position	1: None Shielded 2: Top Body Shielded 3: Top Body Shielded and Bottom Shielded (Package Separately)	CB: Contact Au+Pd/Ni, Dip Tin plated	30: 30 μ"	U: Tube Package